



Used as mounting feet, a range of sizes is available with many held in stock. Standard parts are manufactured in coloured natural rubber 40° Shore A (soft - colour coded green), 55° Shore A (medium - colour coded red), and 70° Shore A (hard - colour coded beige).




● = STANDARD STOCK

Compounds Produced: 40° Shore A (Soft)
 (Natural Rubber) 55° Shore A (Medium)
 70° Shore A (Hard)

Part Number	Dia (mm)	Ht (mm)	Screw Thread Size x L (mm)
●BF1021	15	14	M4 x 13
●BF1022	20	23.5	M6 x 15
●BF1023	25	18.5	M6 x 18
●BF1024	30	28.5	M8 x 20
●BF1025	40	28.5	M8 x 23
●BF1026	50	28	M10 x 28
●BF1027	70	43	M10 x 30
●BF1028	75	37	M12 x 37
●BF1029	100	50	M16 x 45


Part No. SUCTION-BF1021

Compression Characteristics

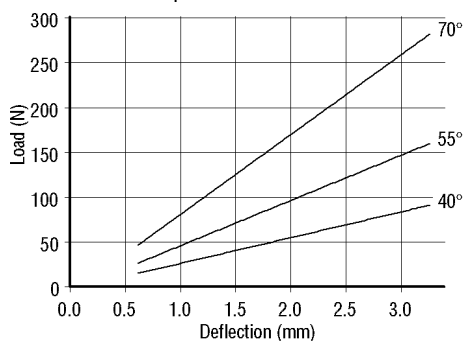


Part No. SUCTION-BF1022

Compression Characteristics

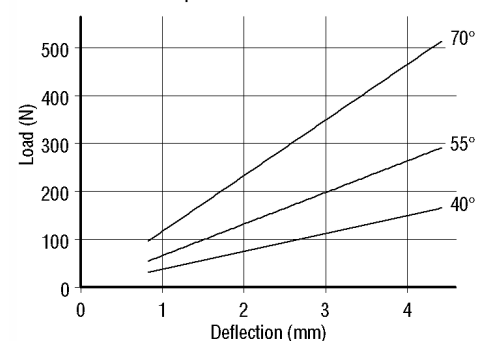


Part No. SUCTION-BF1023

Compression Characteristics

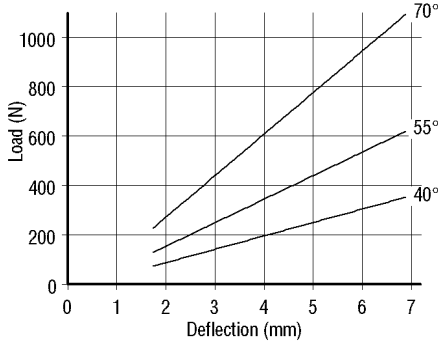


Part No. SUCTION-BF1024

Compression Characteristics

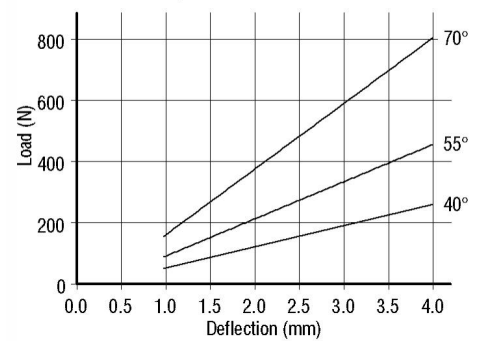


Part No. SUCTION-BF1025

Compression Characteristics

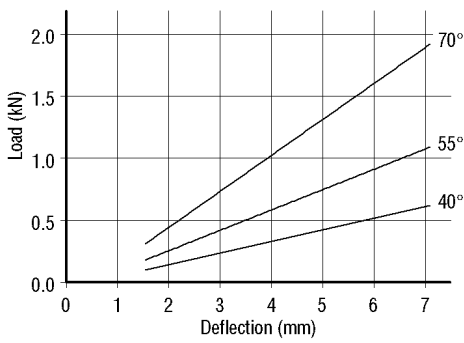


Part No. SUCTION-BF1026

Compression Characteristics

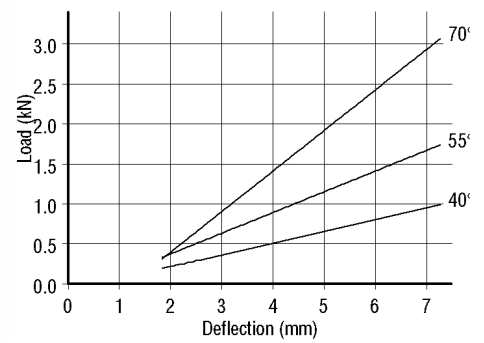


Part No. SUCTION-BF1027

Compression Characteristics

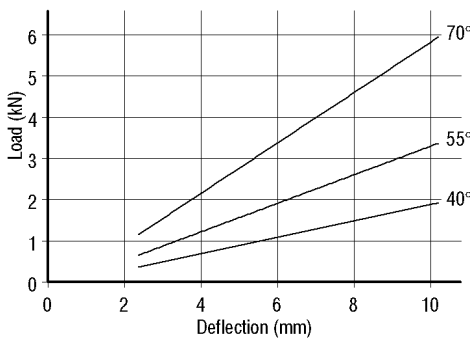

Part No. SUCTION-BF1028

Compression Characteristics

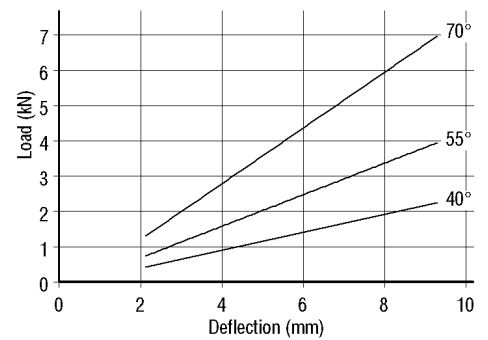

Part No. SUCTION-BF1029

Compression Characteristics

